

[PRODUCT LIST](#) | [PRICE LIST](#) | [COMPARISON GUIDE](#)

[PIPEFREEZING](#) | [HOT TAPPING AND LINE STOPPING](#)

[PRINT PDF](#) | [HOME PAGE](#) | [CONTACT US](#)

[Email this page to a friend](#)

[VIEW PRICE](#)

[ORDER THIS PRODUCT](#)

[CHECK BASKET](#)


1 of 1

Cast iron gate valve BS 5150

- ▶ Handwheel Operated
- ▶ Non Rising stem
- ▶ Bolted Bonnet
- ▶ Flanged & drilled BS 4504 PN 16
- ▶ Face to face Dimensions comply with BS PN 16

Maximum Pressure 16 Bar @ -10°C to 120°C

Test Pressures (Hydraulic)
Shell: 24 Bar
Seat: 16 Bar

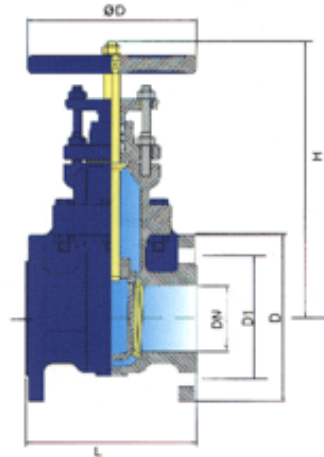

Dimensions (mm)

DN	50	65	80	100	125	150	200	250	300
L	178	190	203	229	254	267	292	330	356
H	280	318	333	387	453	502	635	735	875
D	165	185	200	220	250	285	340	405	460
D1	125	145	160	180	210	240	295	355	410
ØD	178	178	200	254	300	300	348	400	457

Construction

Handwheel	Pressed Carbon Steel
Body	GG 25 Cast Iron
Packing	Asbestos Free
Bonnet	GG 25 Cast iron
Stem	UNI 5035 Brass
Wedge	UNI 5035 Brass (DN 40 – 100) GG 25 Cast Iron (DN 125 – 300)
Seat	UNI 5035 Brass