

[PRODUCT LIST](#) [PRICE LIST](#) [COMPARISON GUIDE](#)

[PIPEFREEZING](#) [HOT TAPPING AND LINE STOPPING](#)

[PRINT PDF](#) [HOME PAGE](#) [CONTACT US](#)

 [Email this page to a friend](#)

[VIEW PRICE](#)


[ORDER THIS PRODUCT](#)

[CHECK BASKET](#)

1 of 2 [Next page](#)

## Commissioning Station

(Double Regulating Valve 2640U together with Measuring Station 2740)

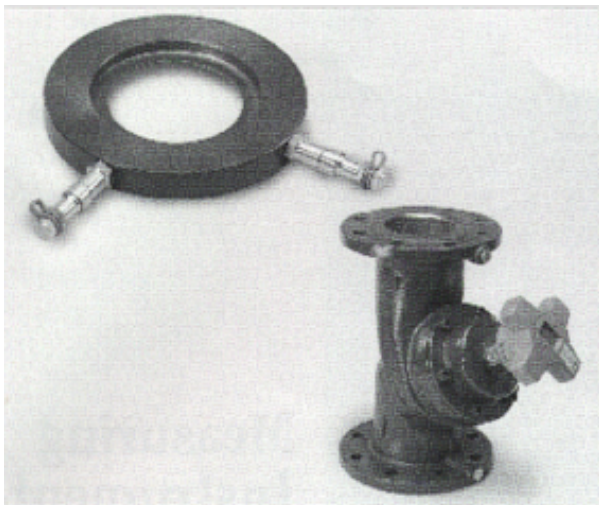

### Pressure / Temperature Ratings

Maximum working emperature: 120°C

Maximum static pressure: 16 bar


Kv values, also pressure and temperature ratings, comply with the requirements of BS7350.

### Dimensions and Weight

See tables below.

Weight (kg)

Kv-values in m<sup>3</sup>/hour at a pressure drop of 1 bar.

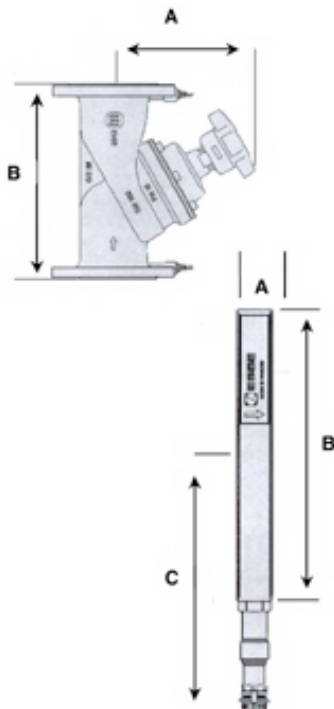

### Double Regulating Valve 2640U

Art No.	Type	Size	A	B	Max. Kv	Weight
5065U	2640U	65	290	225	93.5	14.00
5080U	2640U	80	310	240	110	20.00
5100U	2640U	100	350	260	190	14.00
5125U	2640U	125	400	290	301	40.00
5150U	2640U	150	480	300	425	50.00

### Measuring Station 2740

Art No.	Type	Size	A	B	C	Kvs
5064R	2740	65	20	129	127	93.0
5079R	2740	80	20	144	134	126
5099R	2740	100	20	164	144	244
5124R	2740	125	20	194	159	415
5149R	2740	150	20	220	172	540
5199R	274	200	20	275	200	1010
5249R	2740	250	20	331	228	1450
5299R	2740	300	20	386	255	2400