

[PRODUCT LIST](#) | [PRICE LIST](#) | [COMPARISON GUIDE](#)

[PIPEFREEZING](#) | [HOT TAPPING AND LINE STOPPING](#)

[PRINT PDF](#) | [HOME PAGE](#) | [CONTACT US](#)

[Email this page to a friend](#)

[VIEW PRICE](#)

[ORDER THIS PRODUCT](#)

[CHECK BASKET](#)


1 of 1

Figure 150 Full Bore Cast Iron Flanged Ball Valve

- ▶ Flanged PN16
- ▶ Actuator Direct Mount To ISO 5211
- ▶ Body Cavity Relief

Pressure / Temperature Range
 Maximum Temperature 120°C
 Maximum Pressure 16 Bar

Test Pressures (Hydraulic)
 Shell: 24 bar
 Seat: 17.6 bar

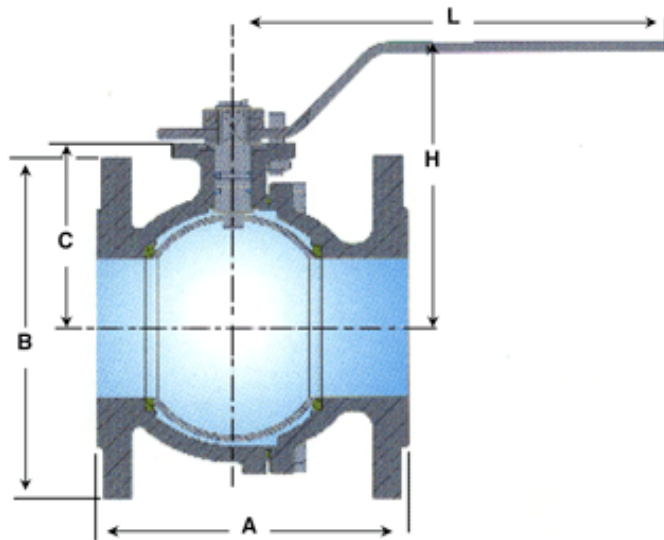

MATERIALS

Part	Material
Body	Cast Iron GG20
Body 'O' Ring Seal	FKM
Ball	304 Stainless Steel
Seat	PTFE
Stem	303 Stainless Steel
Stem Seal	FKM

DIMENSIONS

DN	15	20	25	32	40	50	65	80	100	125	150	200
A	115	120	125	130	140	150	170	180	190	325	350	400
B	95	105	115	140	150	165	185	200	220	250	285	340
C	50	55	60	72	77	80	98	108.5	134	160	190	235
H	108	113	118	130	135	138	156	167	170	195	225	270
L	160	160	160	160	200	200	250	250	320	320	500	500